

IMPORTANT SAFETY INSTRUCTIONS

INSTRUCTIONS PERTAINING TO A RISK OF FIRE, ELECTRIC SHOCK, OR INJURY TO PERSONS.

WARNING – When using electric products, basic precautions should always be followed, including the following:

- Read all the instructions before using the product.
- To reduce the risk of injury, close supervision is necessary when a product is used near children.
- Do not put fingers or hands into the product.
- Ensure the unit is plugged into the correct outlet.
- If the power cord is damaged, **DO NOT USE**. Contact the manufacturer.
- DO NOT IMMERSE** or use where contact with water may occur. Doing so may result in **ELECTRIC SHOCK** and/or **ELECTROCUTION**.
- DO NOT** alter the plug or change the electrical wiring. Doing so may damage the unit and will void the warranty.
- If the unit appears to malfunction, unplug or turn it off immediately and contact your dealer or Vaportek for service advice.
- Use Vaportek approved accessories only.
- Vaportek products use natural essential oils. If an allergic reaction occurs, please discontinue use immediately.

SAVE THESE INSTRUCTIONS

INSTALLATION INSTRUCTIONS

The Restorator® is an easy-to-use, portable system that treats areas up to 20,000 ft³. The unit is primarily intended for delivering a fast, high-intensity odor neutralizing treatment. A characteristic fragrance will be noticeable during operation as the essential oil dry vapor circulates throughout the treatment area. Residual fragrance will dissipate in a matter of hours after treatment ends. With proper care, your Restorator will provide you years of trouble-free service.

Unpackage the unit and cartridge (the consumable). Ensure the machine is turned off before loading the cartridge. Lift off cartridge lid and discard clear film liner. Cartridge life is rated at 270 hours. **DO NOT** tamper with the membrane located within the cartridge. Insert open end of cartridge into the back of the unit, seating firmly against internal gasket. If substantial oil leakage is evident, do not use. Retain cartridge lid for storage by placing against the back of the cartridge. Install spring-loaded cover plate against cartridge lid and twist to lock into place. To operate, plug cord into approved power outlet. Always unplug Restorator® before removing/replacing the cartridge.

GROUNDING INSTRUCTIONS

This product must be grounded. If it should malfunction or break down, grounding provides a path of least resistance for electric current to reduce the risk of electric shock. This product is equipped with a cord having an equipment grounding conductor and a grounding plug. The plug must be plugged into an appropriate outlet that is properly installed and grounded in accordance with all local codes and ordinances.

Ratings:
12W
110/120V

INSTALLATION INSTRUCTIONS DIAGRAM




Fig. 1
Turn off machine. Lift off cartridge lid & discard clear film liner. Cartridge life is rated at 270 hours.

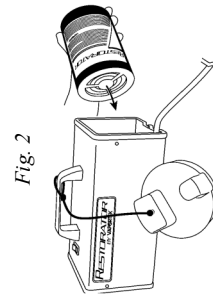


Fig. 2

Insert open end of cartridge into back of machine, seating firmly against internal gasket. If substantial oil leakage is evident, do not use.




Fig. 3

Retain lid for storage by placing against back of cartridge.




Fig. 4

Install spring-loaded cover plate against cartridge lid & twist to lock into place.




Fig. 5

To operate, plug cord into power outlet. Always unplug Restorator before removing cartridge. The cord can be coiled for storage in the back of the rear cover plate.

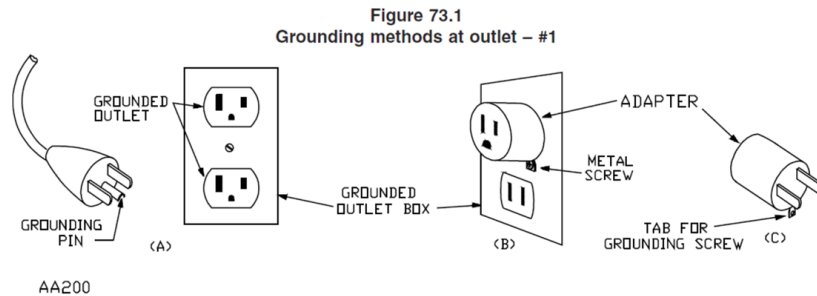


Figure 73.1
Grounding methods at outlet - #1

OPERATION INSTRUCTIONS

Situate unit so air flow at both ends is unobstructed, preferably in a relatively high location. Dry vapor technology travels easily on air current, and has a better opportunity to disseminate throughout the space if placed higher in elevation. Place unit on a firm, stable surface. Turn the unit on, moving it to different areas if appropriate. If an odor is concentrated into one location, begin by placing the unit in that specific space. Close outside windows and doors. Open interior doors and expose contaminated areas to neutralizing dry vapor as much as possible. If the odor is within a building, turn on the air within the space for better air/dry vapor mobility throughout the entire coverage area. If being used for contents restoration, place unit in a deodorizing chamber or tent with contaminated items, and allow neutralizing dry vapor to penetrate. Safe for electronics, leather, elastics, and other valuable or sensitive items. Let unit run several hours or overnight (may require even longer treatment depending on severity of odor damage). Deodorization may require as little as 15-60 minutes for light contamination. For more severe contamination, treatment may take several hours or days. To accelerate the dissipation period of the characteristic Vaportek fragrance, open windows and turn on floor fans.

GROUNDING INSTRUCTIONS CONTINUED

WARNING – Improper connection of the equipment grounding conductor can result in a risk of electric shock. Check with a qualified electrician or serviceman if you are in doubt as to whether the outlet is properly grounded. Do not modify the plug provided with the product – if it will not fit the outlet, have a proper outlet installed by a qualified electrician.

This product is for use on a nominal 120-volt circuit, and has a grounding plug that looks like the plug illustrated in view A in Figure [73.1]. A temporary adapter, which looks like the adapter illustrated in views B and C of Figure 73.1, may be used to connect this plug to a 2-pole receptacle (as shown in view B) if a properly grounded outlet is not available. The temporary adapter should be used only until a properly grounded outlet (view A) can be installed by a qualified electrician. The green-colored rigid ear, lug, or the like extending from the adapter must be connected to a permanent ground, such as a properly grounded outlet box cover. Whenever the adapter is used, it must be held in place by a metal screw. Disconnect the power to the outlet before installing or removing a temporary adapter.

OPERATION INSTRUCTIONS CONTINUED

This system provides a safe, effective alternative to ozone. It is not recommended for use with ozone generating equipment as ozone will destroy our odor neutralizing technology. Not designed for continuous, long-term operation. Use for areas where the source of the odor has been removed, but the odor remains/lingers. Not meant for ongoing odors where the source cannot be removed.

Ideal Applications Include:

- ◆ Real Estate/Foreclosures
- ◆ Smoke/Flood Damage
- ◆ Contents Restoration
- ◆ Contaminated Hotel Rooms
- ◆ Disaster Recovery
- ◆ Crime Scene/Bioremediation
- ◆ Athletic Facilities
- ◆ Vehicle/Boat/RV
- ◆ Medical Facilities

USER MAINTENANCE INSTRUCTIONS

Use standard disinfectant wipes to clean all exterior and water safe surfaces.

MOVING AND STORAGE INSTRUCTIONS

To move the Restorator® to a new location, unplug the unit. Utilizing the handle at the top of the unit, carry the Restorator® to the new location. Plug in the unit and follow the OPERATION INSTRUCTIONS.

To store, unplug the unit and wind the cord into the cord holder on the back of the unit. Ensure that the cartridge has been removed from the unit and recapped. Utilizing the handle at the top of the unit, place the Restorator® in a environment that is relatively free of debris and dust. Keep unit away from flammable sources.

APPROVED CONSUMABLES

The Restorator® is designed for use with Vaportek approved replacement cartridges only. Use of non-approved replacement cartridges will void warranty coverage and may damage the Restorator® unit. Cartridges treat interior areas up to 20,000 ft³. Replace cartridges after 270 hours of use. To extend cartridge life, re-cap when not in use. Shelf life is one year. For best results, store cartridge in a cool, dry location and keep away from extreme heat. Dry vapor output will be affected by humidity, airflow, and temperature. Ideal dry vapor release occurs at 50-80°F. Vapor release significantly increases in excess of 90°F. The membrane inside the cartridge is sealed. Do not puncture or open the internal membrane. Do not allow membrane oils to come in contact with finished surfaces. Finished surfaces may be damaged by direct contact with oils. If oils should leak, wash affected skin, clothes, and/or surfaces with soapy water. SDS information can be found online. We recommend 3X Industrial and/or Smoke Odor Solution (S.O.S.) replacement cartridges.

APPROVED CONSUMABLES CONTINUED

Reorder Information:
Restorator (#90-5000)
3X Industrial cartridge (#90-5150)
S.O.S. cartridge (#90-5150-85)



Five Year Limited Warranty

Vaportek warrants this unit to be free from defects in workmanship and materials, under normal use and service, for five years from date of purchase by the original purchaser. If, at any time during the warranty period, the product is found to be defective or malfunctions, Vaportek will either repair or replace the defective part(s) at its discretion. Warranty does not apply if it is shown by Vaportek that the defect or malfunction was caused by unauthorized modifications, neglect, or abuse by the consumer. Further, any costs incurred by consumer due to unauthorized changes made to the product will not be covered by Vaportek. This warranty does not cover any other charges incurred by the consumer. Vaportek's sole responsibility is to repair or replace product within the terms stated above.

Vaportek shall not be liable for any consequential damages resulting from any breach of warranty, expressed or implied, applicable to this product. Some states do not allow the exclusion or limitation of consequential damages, so this limitation may not apply to you.

This warranty is in lieu of all other warranties, expressed or implied. The warranties of merchant ability and fitness for a particular purpose are hereby excluded beyond the five year duration of this warranty. Some states do not allow limitation on how long an implied warranty lasts, so the above limitation may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which can vary from state to state. This warranty applies only to products sold and used in the United States and Canada. Goods submitted for repair under this warranty must be sent, freight prepaid, to Vaportek, Inc. Call first for a return authorization number.



**For service advice, contact your
dealer or Vaportek.**

P: 800.237.6367 | F: 262.246.5065
www.vaportek.com | info@vaportek.com
W226 N6339 Village Drive, Sussex, WI 53089 USA

#50-5000A

Rev. 9/20

USE AND OPERATING INSTRUCTIONS FOR THE RESTORATOR® (110 / 120V)



Restorator® *An Odor-Neutralizing System*

The Restorator® is an easy-to-use, portable system. It is intended for delivering a fast, high-intensity treatment. This unit is safe to use in occupied spaces.

Easy-to-Use

Just uncap the cartridge, insert into machine, and turn on.

Works Fast

Odor neutralizer is immediate and permanent.

Economical

Cartridges last for multiple jobs.

Proudly made in the USA